


eme Gantry Crane Standard Models

Mobile & Portable: Lift Easily, Anywhere

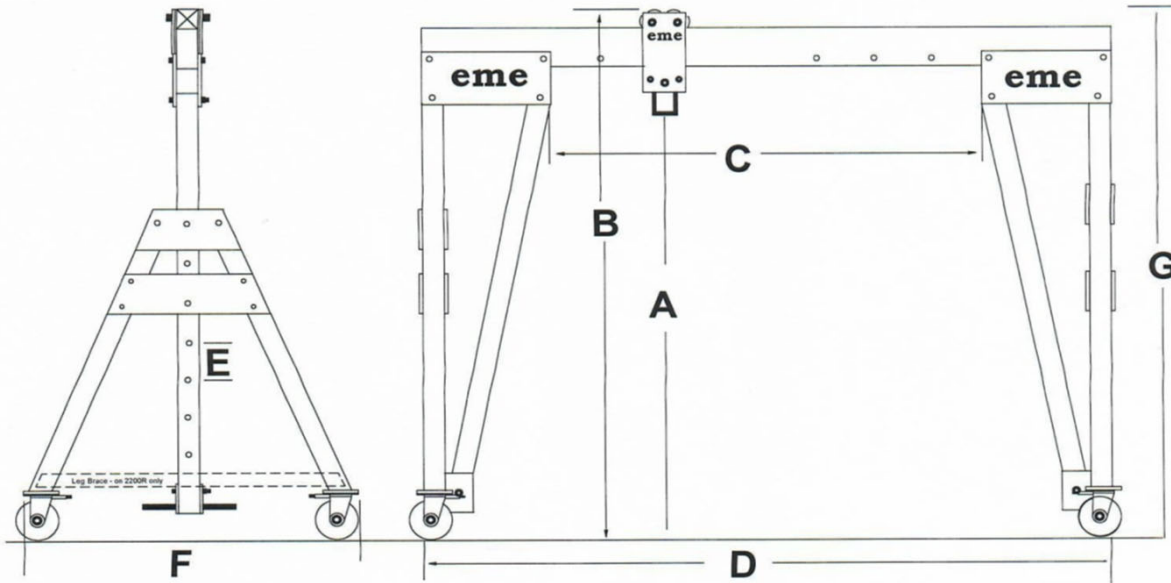

Standard Equipment on All Models

- All Aluminum Construction
- Locking 'Surround-Beam' Trolley
- 4 Position Swivel Locking Casters (roll & swivel)
- Proprietary Box Beam
- Grade L9 Chromate Plated Fasteners
- Height Adjustment Handles

Standard Documentation / Certification/ Safety

- Signed Certificate of Test (crane tested to Proof Load)
- Certified to Roll Loaded
- Engineers Stamped Drawing Provided with each Crane
- 10 Year Warranty on Crane, 2 Years on Casters
- CSA 47.2 Welding
- Mobile Application with Assembly Instructions



A B C D E F G

eme Pro Model	Lift Capacity	Standard Beam Length	Height		Clear Span	Wheel Base	Height		Min Height		Assembled ⁽¹⁾ Weight	Prior to Shipment Cell Load Tested of WLL
			Min/Max Height to Lifting Eye	Max Height to Top of Trolley			Adj. Increment	Caster Spread	to Top of Trolley			
1100R-8	1,100 lbs	8 ft	66-90 in	106 in	5 ft.	93 in	6 in	48 in	82 in	235 lbs	125%	
2200R-8	2,200 lbs	8 ft	66-90 in	106 in	5 ft.	93 in	6 in	48 in	82 in	255 lbs	125%	
2200LW-10	2,200 lbs	10 ft	82-122 in	138 in	7 ft.	117 in	8 in	65 in	98 in	285 lbs	125%	
2200XT-15	2,200 lbs	15 ft	120-176 in	191 in	12 ft.	117 in	8 in	85 in	135 in	NA	125%	
2200 Max-15	2,200 lbs	15 ft	164-252 in	268 in	12 ft.	177 in	8 in	124 in	190 in	NA	125%	
4400M-10	4,400 lbs	10 ft	66-90 in	106 in	7 ft.	117 in	6 in	48 in	82 in	275 lbs	125%	
4400R-10	4,400 lbs	10 ft	82-122 in	138 in	7 ft.	117 in	8 in	65 in	98 in	335 lbs	125%	
4400T-15	4,400 lbs	15 ft	98-138 in	154 in	12 ft.	177 in	8 in	65 in	114 in	365 lbs	125%	
4400XT-15	4,400 lbs	15 ft	120-176 in	191 in	12 ft.	177 in	8 in	85 in	135 in	NA	125%	
4400HELI-15	4,400 lbs	15 ft	135-191 in	207 in	12 ft.	177 in	8 in	85 in	150 in	NA	125%	
4400MAX-15	4,400 lbs	15 ft	133-197 in	213 in	12 ft.	177 in	8 in	106 in	149 in	NA	125%	
6600R-15	6,600 lbs	15 ft	106-154 in	179 in	12 ft.	177 in	8 in	73 in	130 in	551 lbs	125%	
6600MAX-15	6,600 lbs	15 ft	136-216 in	240 in	12 ft.	177 in	8 in	106 in	160 in	NA	125%	
8800MAX-15	8,800 lbs	15 ft	136-216 in	240 in	12 ft.	177 in	8 in	106 in	160 in	NA	125%	
11000R-15	11,000 lbs	15 ft	106-154 in	179 in	12 ft.	177 in	8 in	73 in	130 in	681 lbs	125%	
16500R-15	16,500 lbs	15 ft	101-143 in	173 in	12 ft.	177 in	7 in	81 in	131 in	900 lbs	125%	
22000R-15	22,000 lbs	15 ft	97-139 in	169 in	12 ft.	177 in	7 in	81 in	127 in	904 lbs	125%	

(1) Excludes weight of the trolley

eme Contact Information

Phone: 888-679-5283

For Sales:

solutions@easilymovedequipment.com

For Parts:

parts@easilymovedequipment.com